H - HEAD
B - BLOCK
- SHEAVE DIAMETER
-
D - UNDERHUNG MOUNTING
- NUMBER OF GROOVES
N - SHEAVE MATERIAL (N=NYLATRON, S=STEEL)
- ROPE SIZE (LIFT LINE)
D - DOUBLE
P - PURCHASE

MODEL	CAPACITY	DIM A	DIM B	WEIGHT
HB12-D6N25DP	2000 LBS	2.21 [56mm]	5.00 [127mm]	58.86 LBS
HB12-D8N25DP	2000 LBS	3.08 [78mm]	5.88 [150mm]	63.09 LBS
HB12-D10N25DP	2000 LBS	3.96 [101mm]	6.75 [172mm]	67.26 LBS
HB12-D6S25DP	2000 LBS	2.21 [56mm]	5.00 [127mm]	76.13 LBS
HB12-D8S25DP	2000 LBS	3.08 [78mm]	5.88 [150mm]	83.61 LBS
HB12-D10S25DP	2000 LBS	3.96 [101mm]	6.75 [172mm]	90.97 LBS

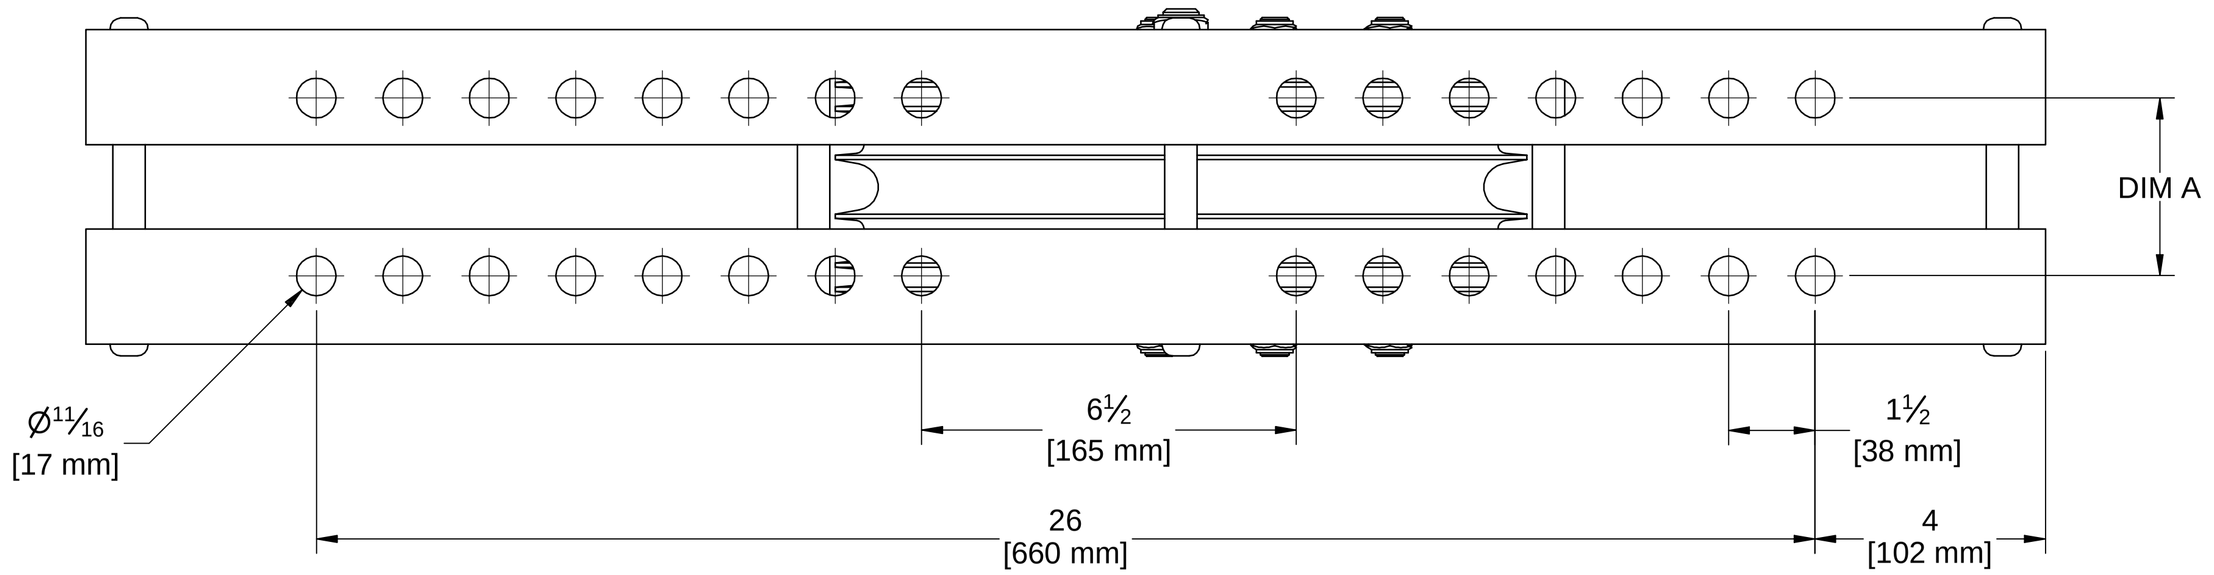

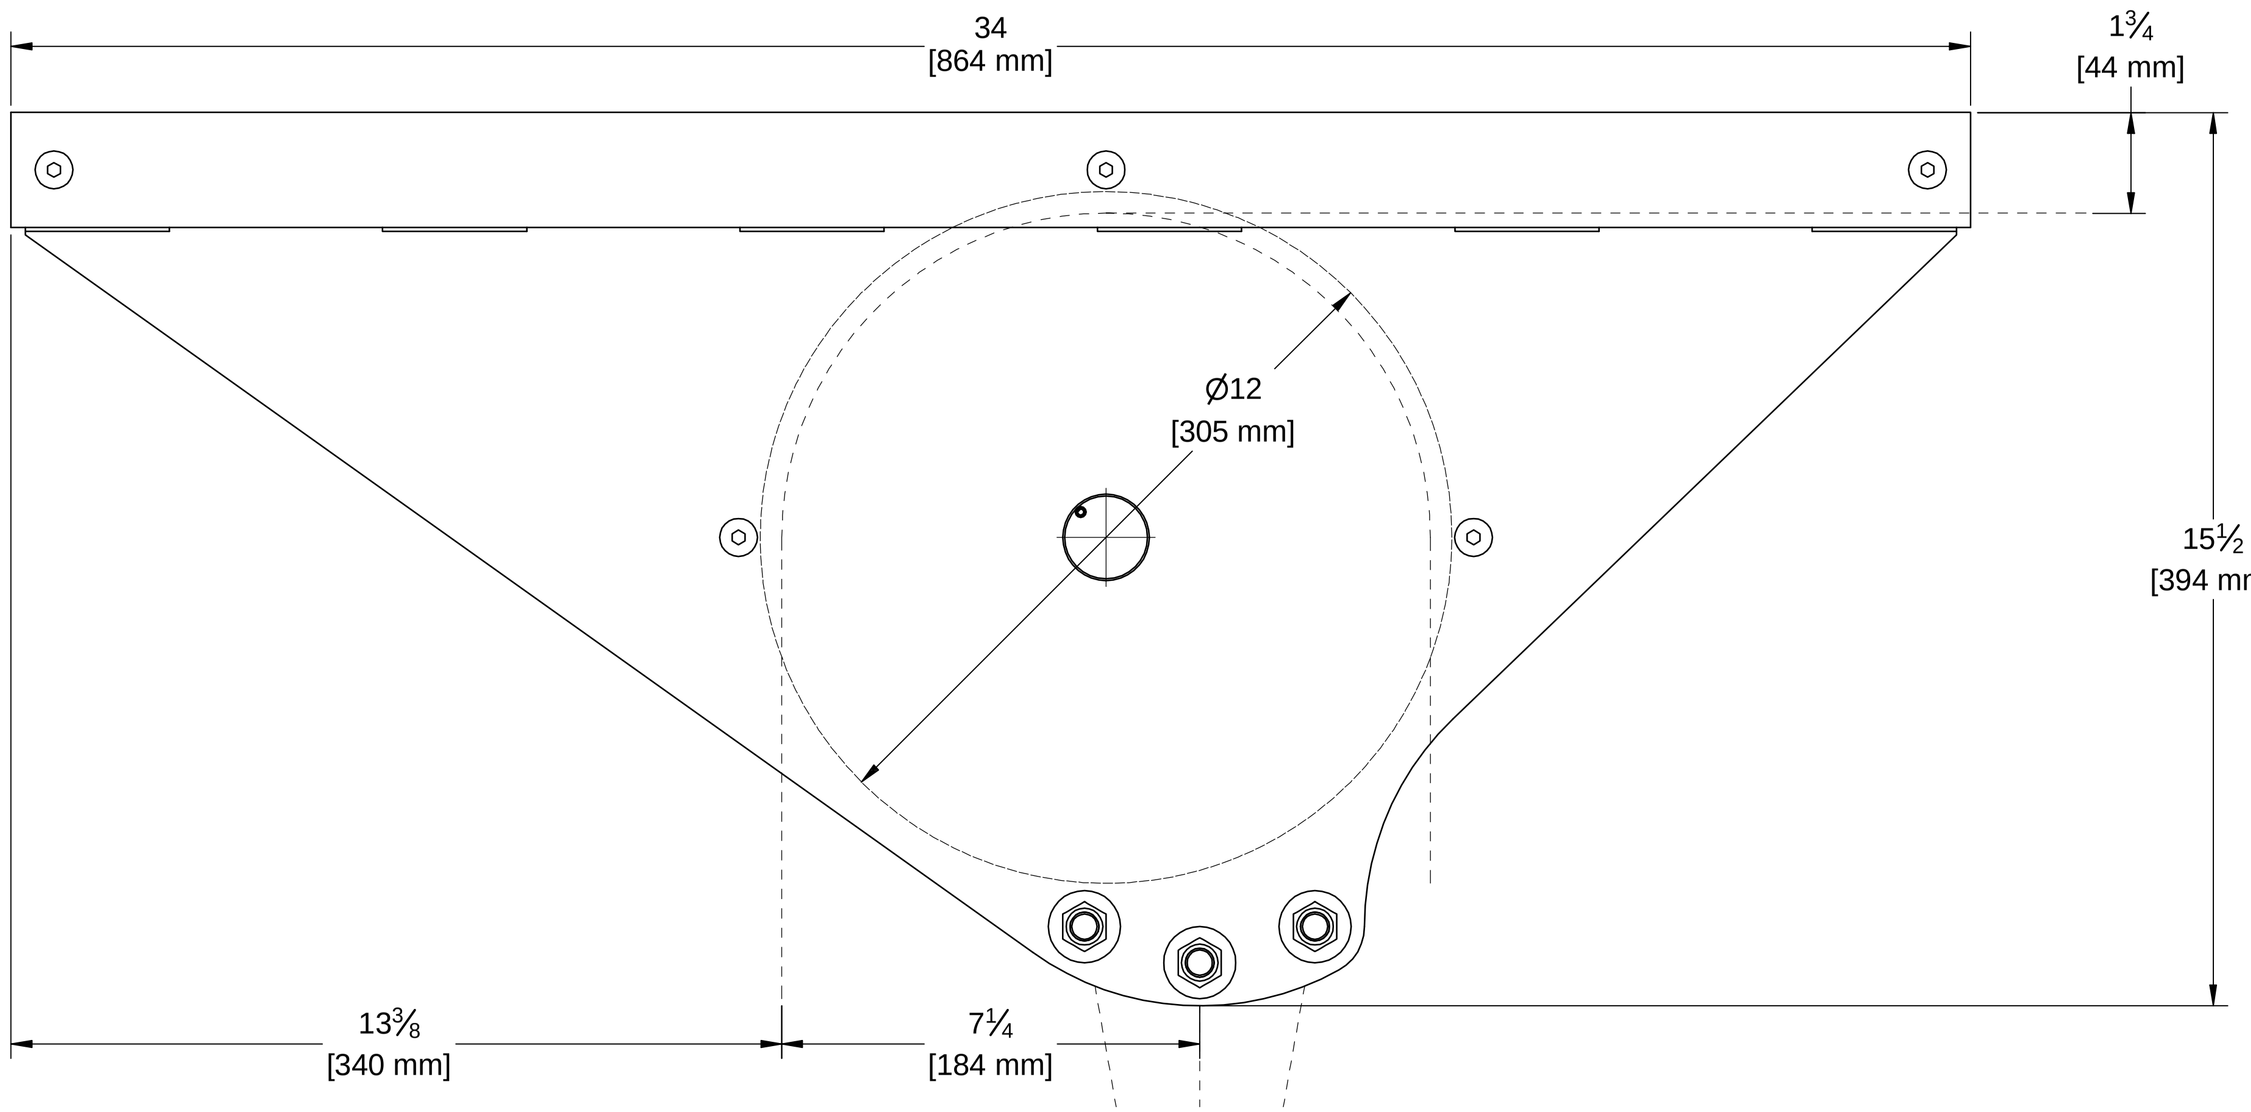

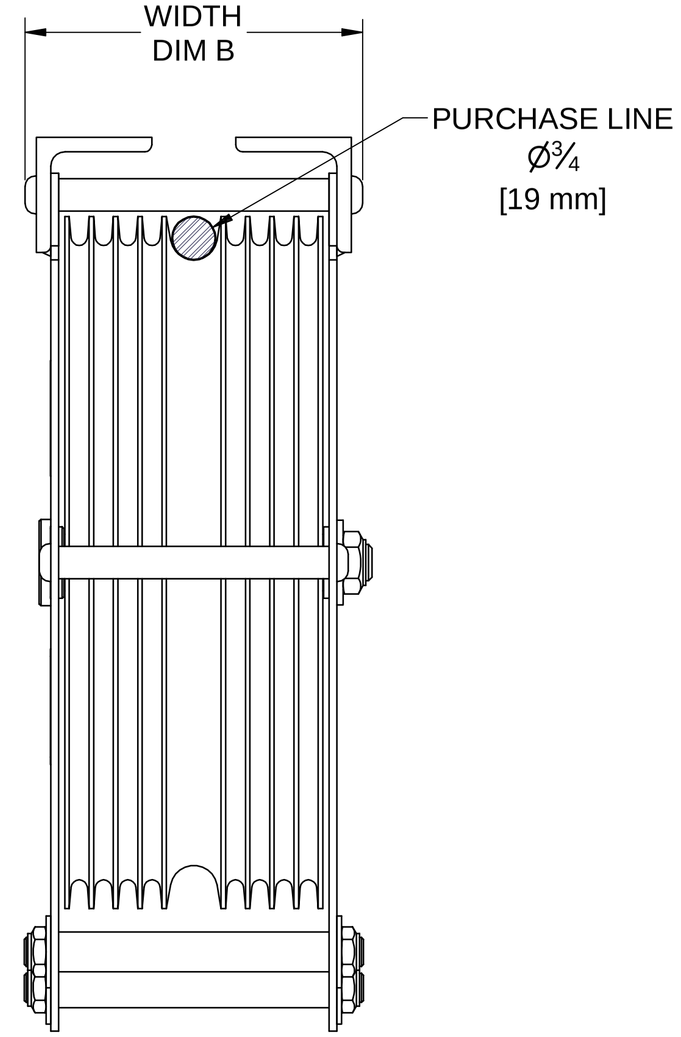

10 GA.
[3.4 mm]

NOTES:
1. MAXIMUM RATED CAPACITY :
   - MAY EXCEED CAPACITY OF THE ROPE.
     USE ROPE MANUFACTURER'S RATING AND SAFETY FACTOR
     TO DETERMINE LOAD LIMIT.
   - WHEN PROPERLY INSTALLED, MAINTAINED AND OPERATED.
   - IS BASED ON CABLES WRAPPED 90 DEGREES AROUND THE SHEAVE.
2. MOUNTING HARDWARE MUST BE DISTRIBUTED EVENLY.
   - MINIMUM OF 4 ATTACHMENT POINTS.
3. CONTACT FACTORY FOR NON-STANDARD REQUIREMENTS.

REV.	DATE	ECN BY	DESCRIPTION
			REVISION

DRAWINGS FOR PRODUCTION APPROVAL. MANUFACTURE WILL NOT BEGIN UNTIL APPROVED DRAWING IS RETURNED TO THERN INC.

COMPANY NAME _____
PRINT NAME _____
SIGNATURE _____ DATE _____

DESCRIPTION: DIMENSIONAL DRAWING
MODEL: 12" HEAD BLOCK UNDR DP
FINISH:
WEIGHT: SEE TABLE
TREAT:
DRAWN BY: JCA
SCALE: NTS
DATE: 10/28/2015

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRAC. ± 1"
ANG. ± 5°
DO NOT SCALE DRAWING

THIS PRINT IS THE PROPERTY OF THERN, INC. AND MUST NOT BE REPRODUCED EITHER IN FULL OR IN PART WITHOUT WRITTEN APPROVAL BY THERN, INC.

THERN INC
5712 INDUSTRIAL PARK ROAD
P.O. BOX 347
WINONA, MN 55987
PHONE 1-507-454-2996
FAX 1-507-454-5282
RETURN TO:

PART NO: D4524
SHEET 1 OF 1