MODEL	CAPACITY	DIM A	DIM B	WEIGHT
HB16-R6N25SP	4500 LBS	2.44 [62mm]	5.34 [136mm]	95.60 LBS
HB16-R8N25SP	4500 LBS	3.31 [84mm]	6.21 [158mm]	102.62 LBS
HB16-R10N25SP	4500 LBS	4.19 [107mm]	7.09 [180mm]	109.64 LBS
HB16-R6S25SP	4500 LBS	2.44 [62mm]	5.34 [136mm]	127.45 LBS
HB16-R8S25SP	4500 LBS	3.31 [84mm]	6.21 [158mm]	139.64 LBS
HB16-R10S25SP	4500 LBS	4.19 [107mm]	7.09 [180mm]	151.84 LBS
HB16-R6N38SP	4500 LBS	3.75 [95mm]	6.65 [169mm]	104.09 LBS
HB16-R8N38SP	4500 LBS	4.88 [124mm]	7.77 [198mm]	111.44 LBS
HB16-R6S38SP	4500 LBS	3.75 [95mm]	6.65 [169mm]	134.66 LBS
HB16-R8S38SP	4500 LBS	4.88 [124mm]	7.77 [198mm]	146.55 LBS

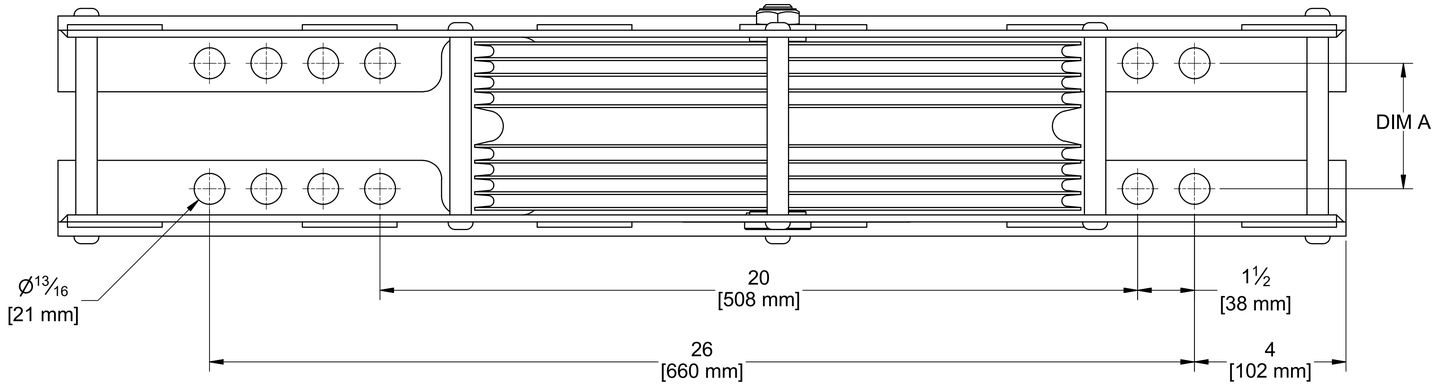

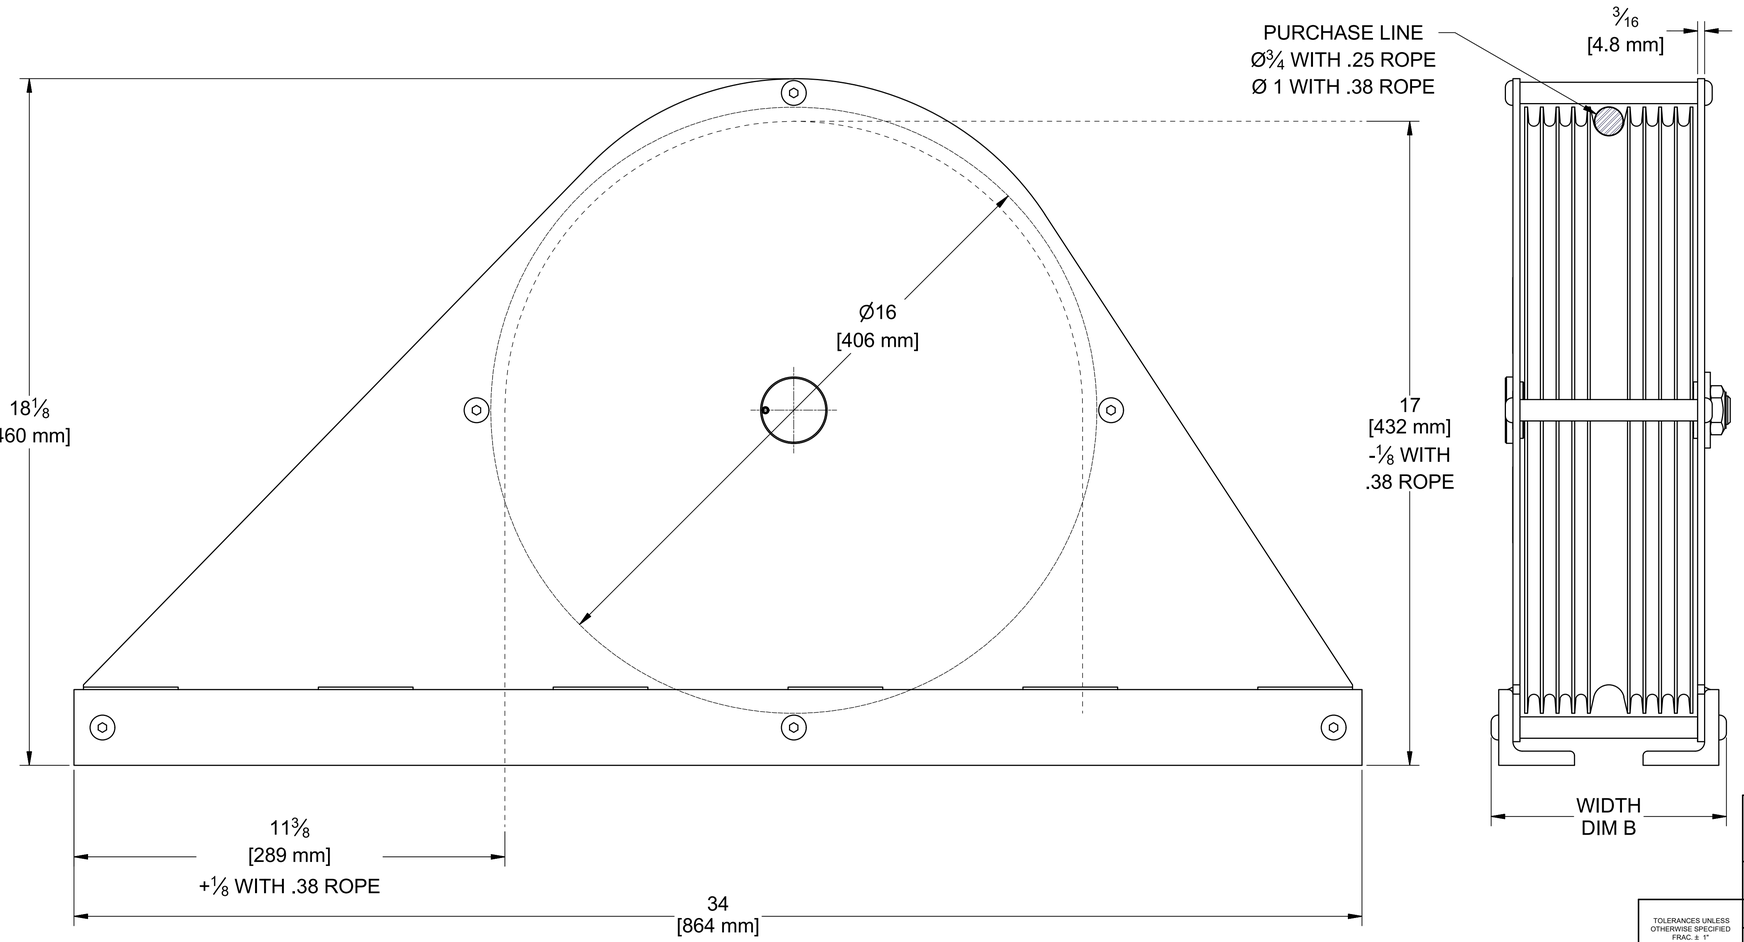

NOTES:
1. MAXIMUM RATED CAPACITY :
   - MAY EXCEED CAPACITY OF THE ROPE.
     USE ROPE MANUFACTURER'S RATING AND SAFETY FACTOR TO DETERMINE LOAD LIMIT.
   - WHEN PROPERLY INSTALLED, MAINTAINED AND OPERATED.
   - IS BASED ON CABLES WRAPPED 90 DEGREES AROUND THE SHEAVE.
2. MOUNTING HARDWARE MUST BE DISTRIBUTED EVENLY.
   - MINIMUM OF 4 ATTACHMENT POINTS.
3. CONTACT FACTORY FOR NON-STANDARD REQUIREMENTS.

H - HEAD
B - BLOCK
- SHEAVE DIAMETER
-
R - UPRIGHT MOUNTING
- NUMBER OF GROOVES
N - SHEAVE MATERIAL (N=NYLATRON, S=STEEL)
- ROPE SIZE (LIFT LINE)
S - SINGLE
P - PURCHASE

REV	DATE	ECN BY	DESCRIPTION
		REVISION	

DRAWINGS FOR PRODUCTION APPROVAL. MANUFACTURE WILL NOT BEGIN UNTIL APPROVED DRAWING IS RETURNED TO THERN INC.

COMPANY NAME _____
PRINT NAME _____
SIGNATURE _____ DATE _____

DESCRIPTION: DIMENSIONAL DRAWING
MODEL: 16" HEAD BLOCK UPRT SP
FINISH:
WEIGHT: SEE TABLE
TREAT:
DRAWN BY: JCA
SCALE: NTS
DATE: 11/3/2015
PART NO: D4547
SHEET 1 OF 3

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRAC. ± 1"
ANG. ± 5'
DO NOT SCALE DRAWING

THIS PRINT IS THE PROPERTY OF THERN, INC. AND MUST NOT BE REPRODUCED EITHER IN FULL OR IN PART WITHOUT WRITTEN APPROVAL BY THERN, INC.

THERN INC
RETURN TO:
5712 INDUSTRIAL PARK ROAD
P.O. BOX 347
WINONA, MN 55987
PHONE 1-507-454-2996
FAX 1-507-454-5282