

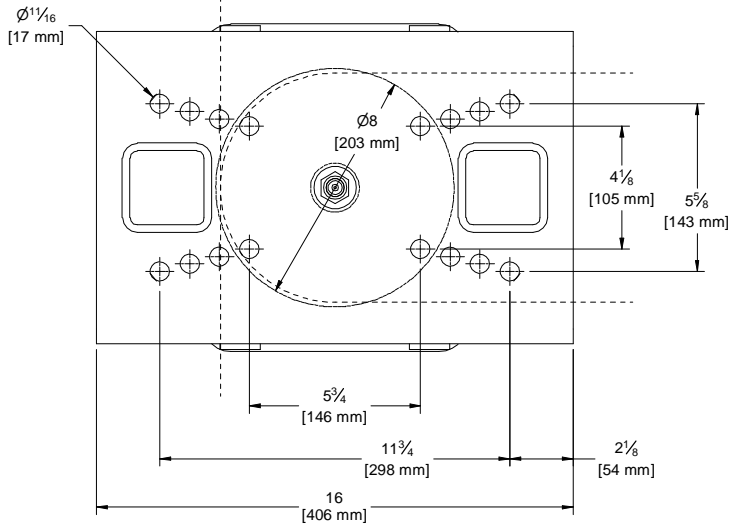


D4569

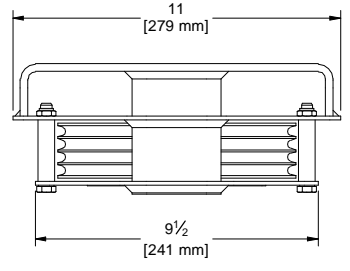

M - MULE  
 B - BLOCK  
 # - SHEAVE DIAMETER  
 T - TAPERED ROLLER BEARING  
 -  
 X - VARIABLE MOUNTING  
 # - NUMBER OF GROOVES  
 N - SHEAVE MATERIAL (N=NYLATRON, S=STEEL)  
 # - ROPE SIZE

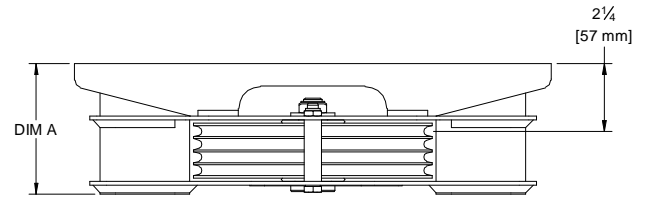

MODEL	CAPACITY	DIM A	WEIGHT
MB8T-X3N25	3000 LBS	3.94 [100mm]	29.57 LBS
MB8T-X4N25	3000 LBS	4.38 [111mm]	31.19 LBS
MB8T-X5N25	3000 LBS	4.81 [123mm]	32.79 LBS
MB8T-X6N25	3000 LBS	5.25 [134mm]	34.40 LBS
MB8T-X7N25	3000 LBS	5.69 [145mm]	36.01 LBS
MB8T-X8N25	3000 LBS	6.13 [156mm]	37.67 LBS
MB8T-X3S25	3000 LBS	3.94 [100mm]	36.36 LBS
MB8T-X4S25	3000 LBS	4.38 [111mm]	38.79 LBS
MB8T-X5S25	3000 LBS	4.81 [123mm]	41.20 LBS
MB8T-X6S25	3000 LBS	5.25 [134mm]	43.63 LBS
MB8T-X7S25	3000 LBS	5.69 [145mm]	46.05 LBS
MB8T-X8S25	3000 LBS	6.13 [156mm]	48.51 LBS

NOTES:  
 1. MAXIMUM RATED CAPACITY :  
 - MAY EXCEED CAPACITY OF THE ROPE.  
 USE ROPE MANUFACTURER'S RATING AND SAFETY FACTOR TO DETERMINE LOAD LIMIT.  
 - WHEN PROPERLY INSTALLED, MAINTAINED AND OPERATED.  
 MUST BE WELDED IN PLACE AFTER FINAL ALIGNMENT.  
 - IS BASED ON CABLES WRAPPED 90 DEGREES AROUND THE SHEAVE.  
 2. CONTACT FACTORY FOR NON-STANDARD REQUIREMENTS.

DRAWINGS FOR PRODUCTION APPROVAL MANUFACTURE WILL NOT BEGIN UNTIL APPROVED DRAWING IS RETURNED TO THERN, INC.		COMPANY NAME _____ PRINT NAME _____ SIGNATURE _____ DATE _____	
DIMENSIONAL DRAWING MODEL: 8' MULE BLOCK		RETURN TO: THERN, INC. P.O. BOX 347 PHOENIX, AZ 85067 PHONE 1-505-454-2068 FAX 1-505-454-2069	
TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONS ± .005" DECIMALS ± .001" DO NOT SCALE DRAWING	THIS PRINT IS THE PROPERTY OF THERN, INC. AND MUST NOT BE REPRODUCED EITHER IN FULL OR IN PART WITHOUT WRITTEN APPROVAL BY THERN, INC.	REVISIONS: REVISION NO. DATE 1 JCA NTS 2/8/2016	PART NO. D4569 SHEET 1 OF 1